



PCT/GB 2003 / 0 0 2 4 9 3



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 15 AUG 2003

WIPO PCT


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

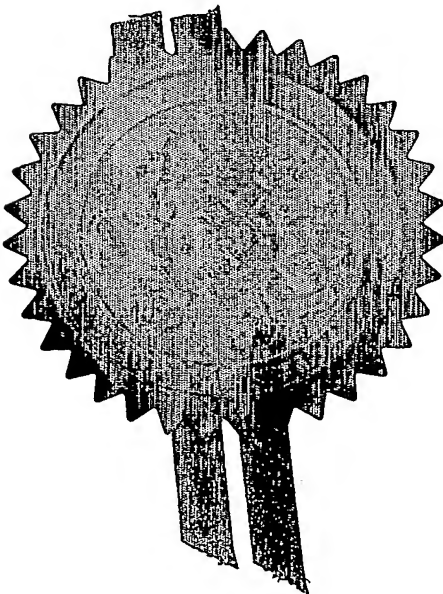

Signed

Stephen Hordley

Dated

11 July 2003

BEST AVAILABLE COPY

Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE

A

12 JUN 2002

NEWPORT

The Patent Office

Cardiff Road, Newport
South Wales NP9 1RH

1. Your reference P650882GB

2. Patent application number 0213414.6
(The Patent Office will fill in this part) 12 JUN 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames) RAWELL GROUP HOLDINGS LIMITED
CARR LANE
HOYLAKE, WIRRAL
MERSEYSIDE
CH47 4AZ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation GB

6326138001

4. Title of the invention WATERPROOFING MATERIAL

5. Name of your agent (if you have one) URQUHART-DYKES & LORD
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) GREG'S BUILDINGS
1 BOOTH STREET
MANCHESTER
M2 4DU

Patents ADP number (if you know it) 1644014

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

	Country	Priority application number (If you know it)	Date of filing (day/month/year)
--	---------	---	------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

	Number of earlier application	Date of filing (day/month/year)
--	-------------------------------	------------------------------------

8. Is a statement of inventorship and or right to grant of a patent required in support of this request? (Answer "Yes" if:)

- a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body;
see note (d)

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form -

Description 6 /

Claim(s) 3 /

Abstract -

Drawing(s) 2 + 2

- 10 If you are also filing any of the following items state how many against each item:

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (patents form 7/77)

Request for preliminary examination and search (patents form 9/77) 1 /

Request for substantive examination (patents form 10/77)

Any other documents (please specify)

11

I/We request the grant of a patent on the basis of this application.

Signature

Date 11/06/02

Urquhart-Dykes & Lord
URQUHART-DYKES & LORD

- 12 Name and daytime telephone number of person to contact in the United Kingdom R A BARKER 0161 832 9353

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patent Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

1) if you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

2) Write your answers in capital letters using black ink or you may type them.

3) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

4) If you have answered "Yes" Patents Form 7/77 will need to be filed

5) Once you have filled in the form you must remember to sign and date it.

6) For details of the fee and ways to pay please contact the Patent Office.

- P650882 GB -

WATERPROOFING MATERIAL

This invention concerns a waterproofing material in sheet form comprising a core layer, which incorporates swellable bentonite clay, sandwiched between respective carrier layers.

Such material is used as a liner to retain water in artificial ponds, lakes, lagoons etc. It is also used for lining and for capping, i.e. covering, landfill waste deposit sites where the ground below has to be protected against leakage of contaminated liquid. It is used for a similar function and laid below petrol (gasolene) stations or comparable sites to prevent contamination of the water table by spillage of such material. It may also be used more generally as a waterproof layer below buildings and other structures and as a roofing material.

In one form, the core layer comprises bentonite clay in particulate or granular form and the carrier layers are joined by either stitching or needle punching through the clay layer. Material of this form is described in EP-A-0059625, EP-A-0246311 and GB2202185. Such material has to be wetted after installation so that the clay absorbs water before it becomes impermeable. If the material is damaged in transit or the in-situ wetting is uneven or insufficient the uniformity and reliability of the waterproofing layer may be suspect.

In another form, the core layer of bentonite clay is already partially hydrated by being mixed with water, and variable optional dissolved substances, to form a plastic mass and then extruded or

rolled to sheet form. Thus, the material is already waterproof before installation and the impermeability is uniform. Material of this form is described in the applicants' earlier WO 94/05863.

The latter type of material has the disadvantage of low shear strength. Because the carrier layers are not tied together, they can slide relative to each other, with the clay in the core layer acting as a lubricant. This precludes use of such material on sloping substrates where the angle of inclination is greater than about 6-8°. This precludes its use in many landfill situations.

An object of the invention is to overcome this disadvantage.

With this object in view, the invention provides a waterproofing material as specified in the first paragraph, characterised in that the carrier layers are connected to each other by ultrasonic welding at intervals and/or along one or more lines.

This manner of joining the carrier layers is applicable to both forms of material described above, namely those having particulate bentonite in the core layer as well as those having a clay-containing core layer formed from a plastic (deformable) mass.

Carrier layers of such materials are conventionally woven or non-woven textile fabrics, which are permeable, it being necessary to allow water to permeate into the core clay containing layer after the material is installed on site and covered to enable it to swell and provide a long term substantially impermeable layer. However, materials of this type, including the applicant's own

'Slabseal' product, are known wherein one of the carrier layers is an impermeable membrane of plastics material.

For purposes of the present invention, non-woven textile fabrics are preferred as carrier layers. These may suitably be of polypropylene fibre, although other materials, such as PVC, or polyethylene, or polyester fibre may be possible.

In certain embodiments a mesh reinforcement may be included in the core layer. One of the carrier layers can then be connected to the reinforcement by a first series of ultrasonic welds while the other of the carrier layers is connected to the reinforcement by a second series of ultrasonic welds, which are offset in position relative to the first series. This has the advantage that a certain thickness of the core waterproofing material is always present, i.e. there are no potentially permeable gaps.

The invention will be described further, by way of example, with reference to the accompanying drawings, in which;

Fig. 1 is a schematic perspective view showing how, in a first embodiment of the invention, a small section of material is welded along a line by ultrasonic means;

Fig. 2 is a similar view showing the material after welding;

Fig. 3 is a cross-section along line A-A in Fig. 2;

Fig. 4 is a schematic perspective view of a second embodiment of the material of the invention;
and

Fig. 5 is a cross-section along line B-B in Fig. 4.

As illustrated in Figs. 1 to 3, the first exemplary embodiment comprises a core layer 10 of a semi-hydrated bentonite clay composition which has been rolled or extruded to sheet form and sandwiched between respective carrier layers 12, 14.

Preferably, both carrier layers 12, 14 are of non-woven textile fabric, such as polypropylene. Use of non-woven material enables a stronger weld to be formed. However, it is possible to achieve a weld of reasonable strength using one non-woven carrier layer and one woven carrier layer. It may also be possible to use one carrier layer of impermeable film, the other of woven or non-woven textile.

In full scale production the material may be up to 5m wide. Only a small section is illustrated, and one means of ultrasonically welding the carrier layers thereof. With reference to Fig. 1, the material is placed over a base plate 20 on which there is a triangular cross section projection 22. A sonotrode 24 is brought into contact with the material over the projection, which serves to separate the material of the core layer 10. As the ultrasonic frequency is applied, the core layer is cut and the two fabrics 12, 14 are welded together.

The resultant weld line 18 is shown in Figs. 2 and 3.

Preliminary tests indicate that a plurality of spaced line welds, from a few cm apart to over 1m apart, where both carriers are of non-woven polypropylene fabric, will increase the sheer strength of the composite until it is comparable to commercially available material of the type where the core layer is particulate and the carrier layers are joined by stitching or needle-punching or any other means. This would enable the material to be used on any land slope up to about 60°.

Where some material of the clay containing core layer 10 remains between the carrier layers 12 and 14 at the weld line 18, the strength of the weld is reduced, by up to 50%, as measured by the force required to peel apart the layers 12 and 14.

An additional layer of an impermeable film, eg polypropylene or PVC, may be incorporated between either carrier layer 12, 14 and the core layer 10. This may in some cases improve the strength of the weld. However, its primary purpose is to control the permeability of the composite material and prevent the weld lines 18 from becoming permeable and breaching the overall integrity of the water impermeable barrier, which is to be formed by the composite.

In other embodiments, strips of impermeable film, as narrow as 5mm, may be provided at the locations of welding lines. These may be provided prior to welding, between the core layer 10 and either (or both) carrier layers 12, 14. Alternatively, such strips may be laid in place, possibly adhered, on the outer surface of either carrier layer 12, 14 either before or after welding.

The weld lines, which may be about 15mm long, could also be filled in externally with additional bentonite containing deformable material, comparable to that in the core layer 10.

A plurality of spaced weld lines may suitably be provided either parallel or perpendicular to the width of the composite material. Thus it may take on the appearance of a duvet. However, other welding patterns may be suitable, such as point welds, or circular welds, distributed over the material, or continuous lines across the width, stopping short of the edge margins to allow for overlapping when the material is installed on site. A continuous zig-zag weld across the material could also be a possibility.




A further development is illustrated in Figs. 4 and 5. To improve the resistance of the material to relative slippage of the carrier layers, a flexible, perforate reinforcement means is incorporated into the core layer 10. In the illustrated example, a polypropylene mesh 16 is included in the core layer 10 intermediate the layers 12, 14 (same reference numbers as Figs. 1 to 3). This mesh 16 is welded by ultrasonics, to both the carrier layers 12, 14. As shown, the weld lines 26 joining the first carrier layer 12 to the mesh 16 are offset from the weld lines 28 joining the second carrier layer 14 to the mesh 16. This reduces the risk of permeability at the welds because there always remains a certain thickness of core material.

Claims



1. A waterproofing material in sheet form comprising a core layer, which incorporates swellable bentonite clay, sandwiched between respective carrier layers, characterised in that the carrier layers are connected to each other by ultrasonic welding at intervals or along one or more lines.
2. A material according to claim 1 wherein at least one of the carrier layers comprises a non-woven textile fabric.
3. A material according to claim 1 or 2 wherein the carrier layers comprise polypropylene, polyethylene or polyvinylchloride.
4. A material according to any of claims 1, 2 or 3 including a further layer which is an impermeable film or membrane.
5. A material according to any of claims 1, 2 or 3 wherein an impermeable film or membrane is provided at the locations of ultrasonic welding.
6. A material according to any preceding claim wherein the core layer is formed by extrusion or rolling from a deformable plastics mass wherein the bentonite is semi-hydrated.

7. A material according to any preceding claim wherein a flexible perforate reinforcement is included in the core layer.
 8. A material according to claim 7 or 8 wherein the reinforcement is a mesh of plastics material.
 9. A material according to claim 7 or 8 wherein one of the carrier layers is connected to the reinforcement by a first series of ultrasonic welds and the other of the carrier layers is connected to the reinforcement by a second series of ultrasonic welds, which are offset in position relative to the first series.
 10. A method of producing a waterproofing material in sheet form comprising sandwiching a core layer incorporating swellable bentonite clay between respective carrier layers and connecting the carrier layers by ultrasonically welding at intervals or along one or more lines.
 11. A method of producing a waterproofing material in sheet form comprising sandwiching a core layer incorporating swellable bentonite clay between respective carrier layers and including a mesh reinforcement within the core layer, connecting one of the carrier layers to the reinforcement by ultrasonically welding at a first series of locations and connecting the other of the carrier layers to the reinforcement by ultrasonic welding at a second series of locations which are offset relative to the first series.
-

12. A material substantially as hereinbefore described with reference to Figs. 1 to 3 or Figs. 4 and 5 of the accompanying drawings.
-

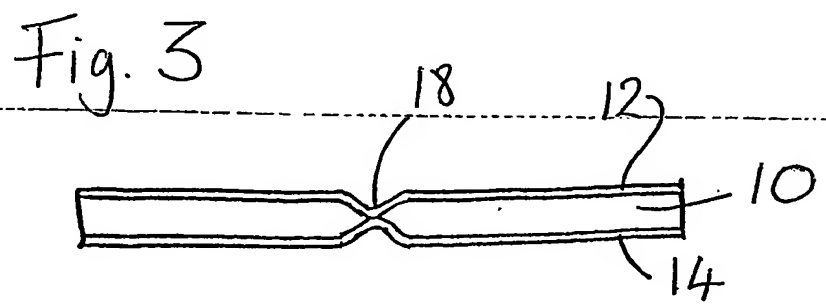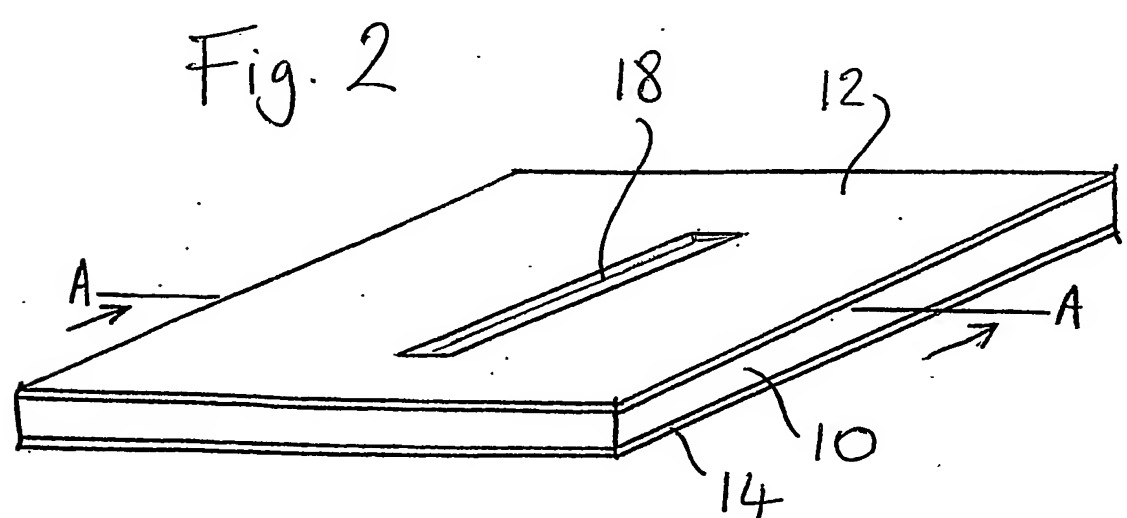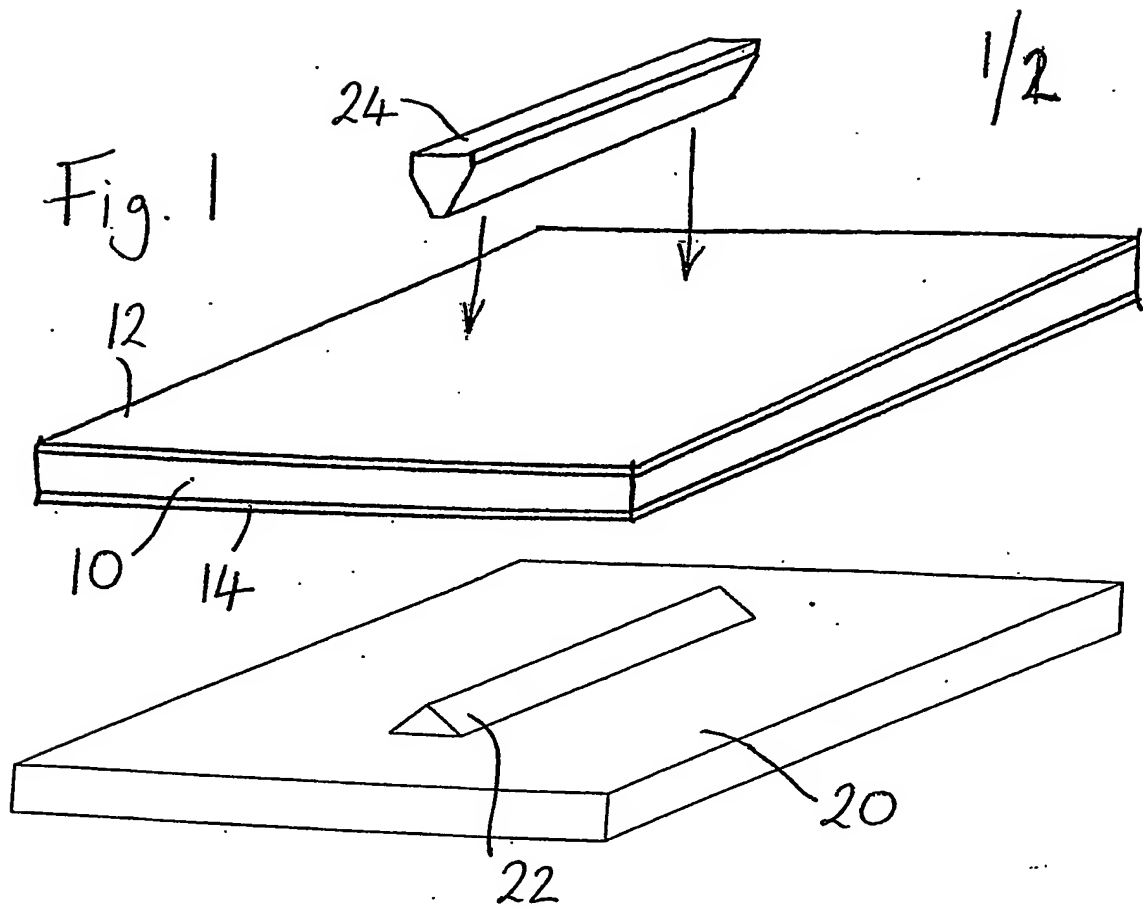

2/2

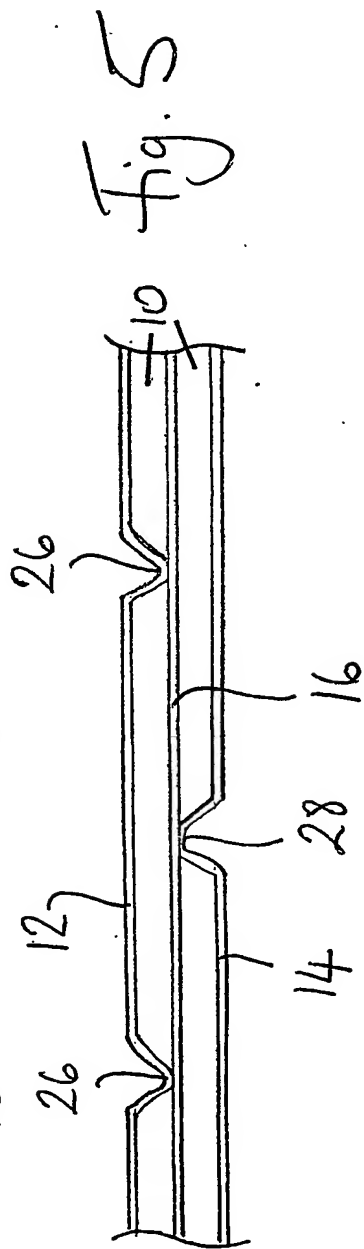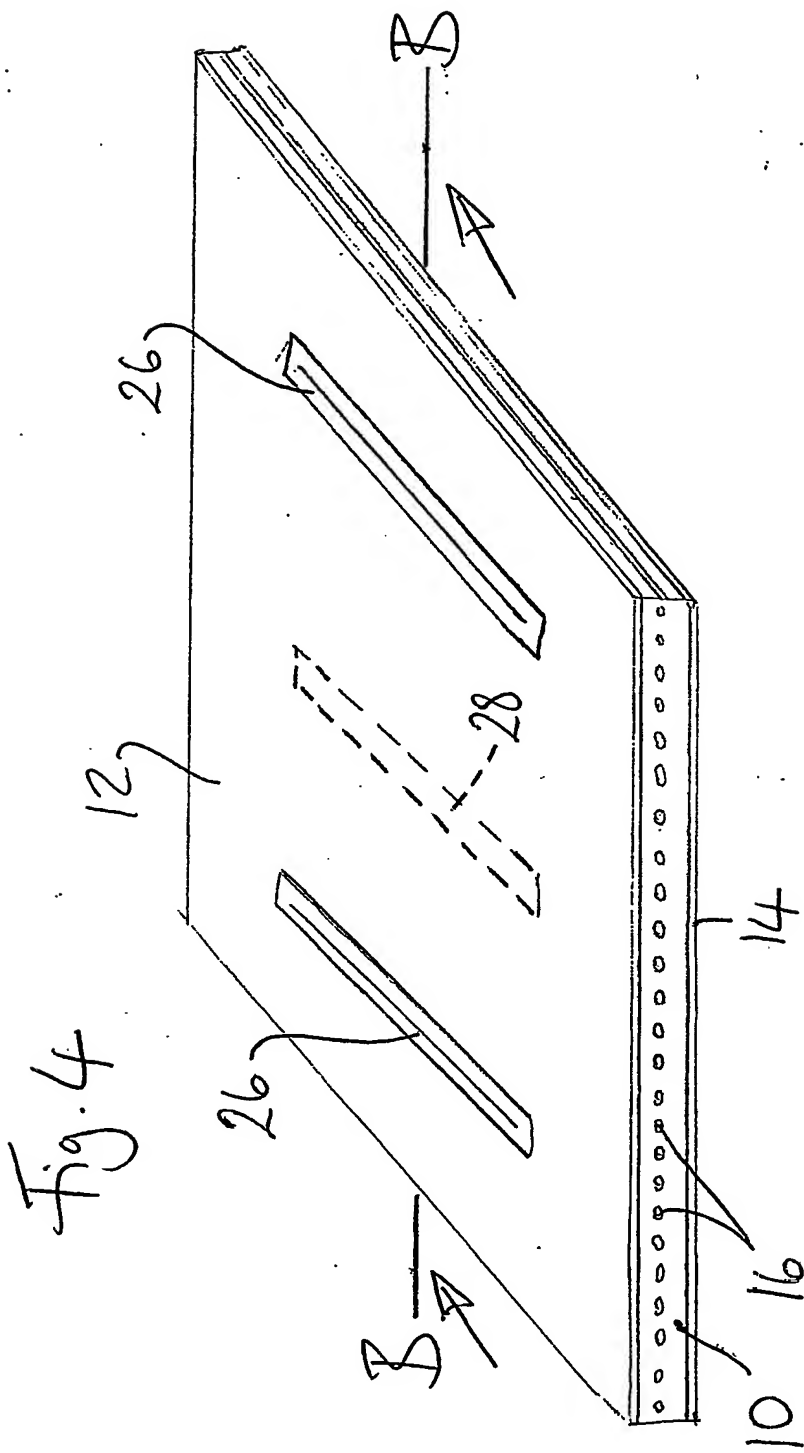

THE PATENT OFFICE

14 JUL 2003

Received in Patents
International Unit

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.